

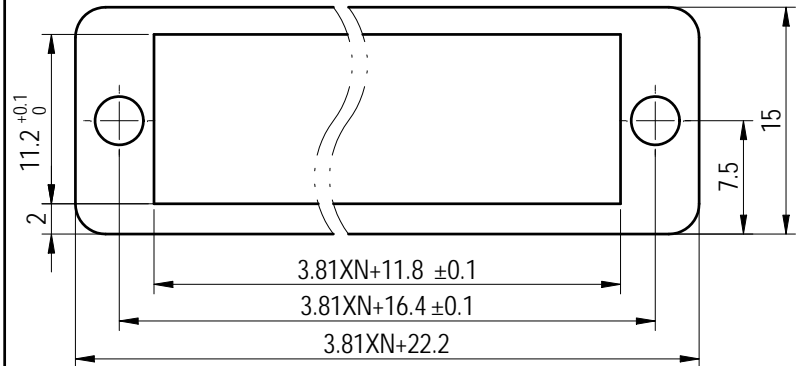
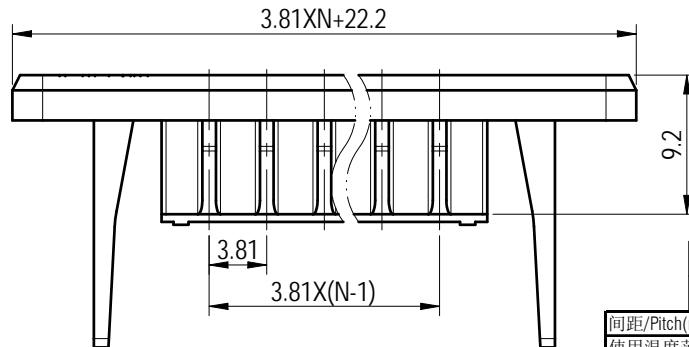
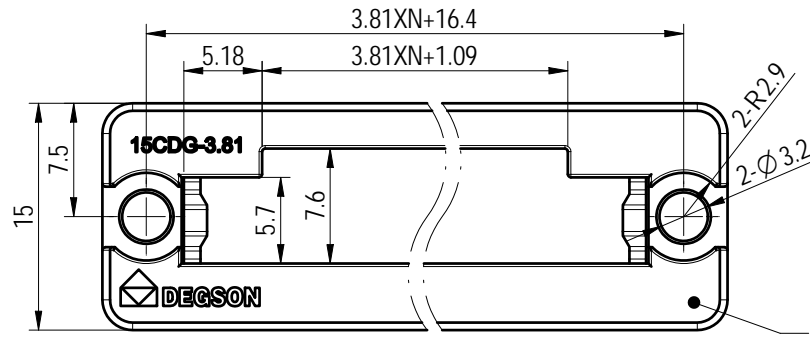



PCB LAYOUT

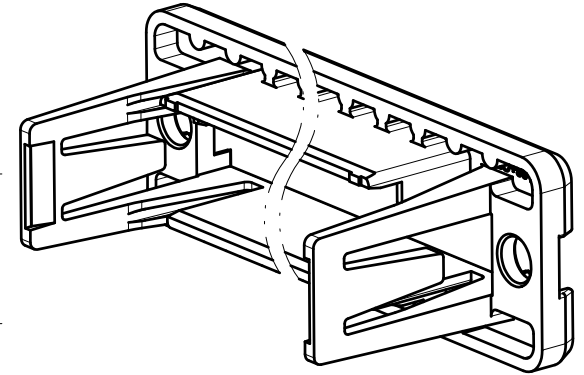

未注公差/General tolerances (mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

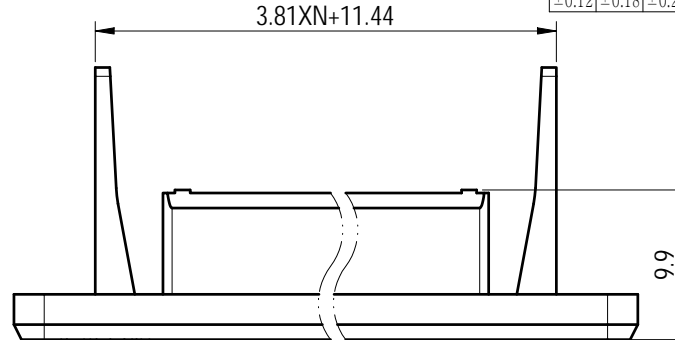

1	Housing	PA66+GF	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles			3.81/N=02~16P
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

		MATERIAL: PA66-GF25		SURFACE/COLOR: PANTONE 556C	
		MAT NO./REV: - / 00		MAT STATUS: 设计放行	
APPD: 兰春华	2023.10.24	NAME			
CHKD: 龚耀志	2023.10.24	15CDG-3.81-XXP-1Y-00Z (H)			
DRFT: 方哲盛	2023.10.24	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200032563	CUSTOMER DRAWING	work	2:1
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET
00		方哲盛		2023.10.24	1/1

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除特别说明外, 本文件的所有权保留。未经书面授权, 不得复制或进行任何方式的传播。 除特别说明外, 本文件的所有权保留。未经书面授权, 不得复制或进行任何方式的传播。