


未注公差/General tolerances(mm)											0.1/10 ±2'		
0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315		>315 ~400	>400 ~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

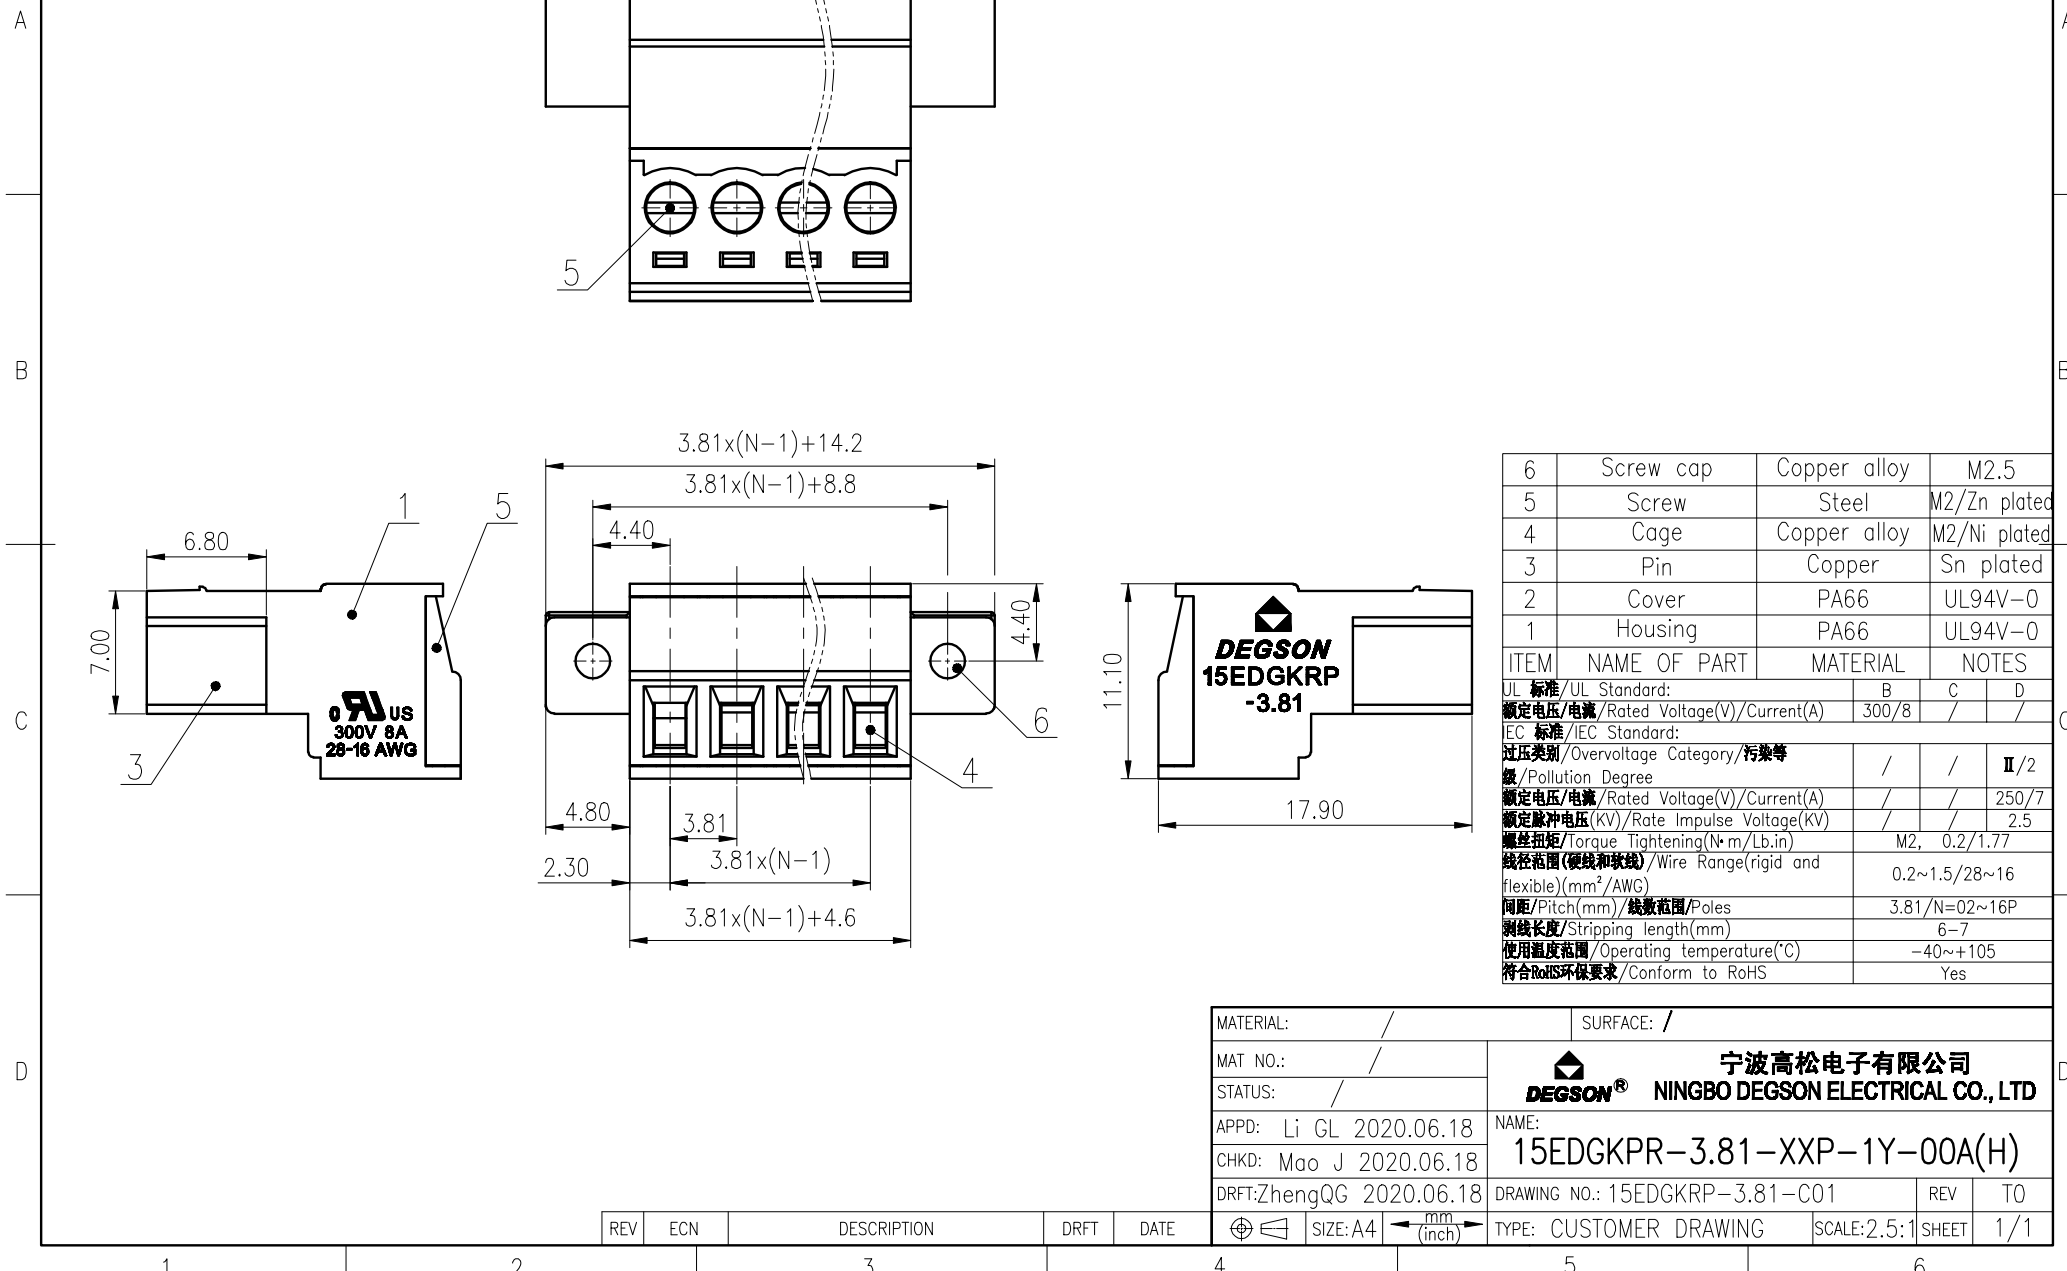

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw cap	Copper alloy	M2.5
5	Screw	Steel	M2/Zn plated
4	Cage	Copper alloy	M2/Ni plated
3	Pin	Copper	Sn plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	/	/	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	250/7
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	/	/	2.5
螺栓扭矩/Torque Tightening(N·m/Lb.in)	M2, 0.2/1.77		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~1.5/28~16		
间距/Pitch(mm)/线数范围/Poles	3.81/N=02~16P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: Li GL 2020.06.18	NAME: 15EDGKPR-3.81-XXP-1Y-00A(H)		
CHKD: Mao J 2020.06.18	DRAWING NO.: 15EDGKPR-3.81-C01		
DRFT: ZhengQG 2020.06.18	REV	TO	
④	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE